


FP9500-01/FP9600-01

Installation Instructions

STEP 1:

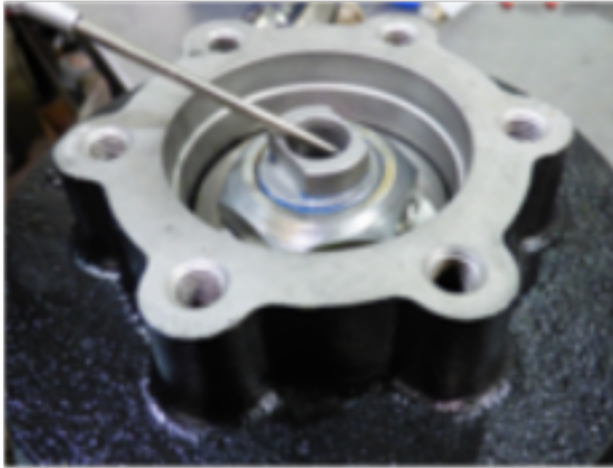

Make sure there are no damages or wear to the shaft. Too much wear will cause air leaks and the clutch to slip.

STEP 2:



Make sure that the shaft is well lubricated with o-ring lube.

STEP 3:



Make sure that o-ring lubrication is also applied to the Kysor fan clutch shaft.

STEP 4:



Make sure that the alignment of shaft and rubber bumper are true before applying pressure. Once top section is flush with hub assembly, tighten bolts crosswise.